

SPECS

INPUT

Interface	Quantity	Connector	Spec
DVI	2	DVI-I	DVI1.0 , VESA Standard , PC to 1920x1200
VGA	2	DB15	VESA Standard, PC to 1920X1200
VID	2	BNC	PAL/NTSC/SECAM 1Vpp±3DB(0.7V Video+0.3V Sync) 75 ohm
HDMI	1	HDMI	DVI1.0 , HDMI1.3 PC to 1920x1200 , HD to 1080p
SDI*	2	BNC	1080p 60/50/30/25/24 1080i 60/50 720p 60/50 625i 525i

PREVIEW OUTPUT

Interface	DVI*1, DVI/VGA*1			
Connector	DVI-I			
Standard	VESA Standard			
Resolution	640x480@60Hz	800x600@60Hz	1024x768@60Hz	1280x1024@60Hz
	1366x768@60Hz	1440x900@60Hz	1600x1200@60Hz	1680x1050@60Hz
	1920x1080@60Hz	1920x1200@60Hz	2048x1152@60Hz	1920x1080@50Hz
	1280x720@50Hz			

LED OUTPUT

Interface	DVI*1, DVI/VGA*1				
Connector	DVI-I				
Standard	VESA Standard				
Resolution	640x480@60Hz	800x600@60Hz	1024x768@60Hz	1280x1024@60Hz	1366x768@60Hz
	1440x900@60Hz	1600x1200@60Hz	1680x1050@60Hz	1920x1080@60Hz	1920x1200@60Hz
	2048x1152@60Hz	2560x960@60Hz	1920x1080@50Hz	1280x720@50Hz	2304x1152@60Hz
	1920x1280@60Hz	1536x1536@60Hz	1280x1920@60Hz	User defined resolution	

PROGRAM OUTPUT *

Interface	DVI	VGA	SDI	VID
Connector	DVI-I	DB15	BNC	BNC
Quantity	1	1	1	1
Resolution	VGA/DVI: 640x480@60Hz 800x600@60Hz 1024x768@60Hz 1280x1024@60Hz 1440x900@60Hz			
	1600x1200@60Hz 1680x1050@60Hz 1920x1080RB@60Hz 1920x1200RB@60Hz			
	SDI/DVI: 1080p 60/59.94/50/30/29.97/ 25/24/23.98 1080i 60/59.94/50 720p60/59.94/50 625i 525i			
	VID : PAL NTSC			

GENERAL

Net weight	Dimension	Power supply	Power consumption	Working temperature
4.7kg	6.5cm(H)x44cm(w)x32cm(D)	100VAC – 240VAC 50/60Hz	40W	0°C ~ 45°C

* Expanding model

CONTACT US


Tel: +86-0755-8618 0829
 Fax: +86-0755-8653 8364
 Web: www.jstron.com
 Tech Support: support@jstron.com
 Email: sales@jstron.com
 Add : 305 ,West Tower ,Haida Creative Park , Nanshan District, Shenzhen, China

Ellen
 Phone : +86-180 3818 6112
 Email : ellen@jstron.com
 Skype : jstron01

Alice
 Phone : +86-180 3818 6113
 Email : alice@jstron.com
 Skype : jstron02

JSTRON • SPEED LEADER • DVX602


- 9 video inputs
- Preview ,Program and LED outputs
- 2*3G-SDI inputs (optional)
- Preview ,Program operate separately
- DVI loop
- Seamless switch
- Up to 4096(H) or 2160(V) input and output
- Multi-format Program output: 3G-SDI/ DVI/VGA/VID(optional)

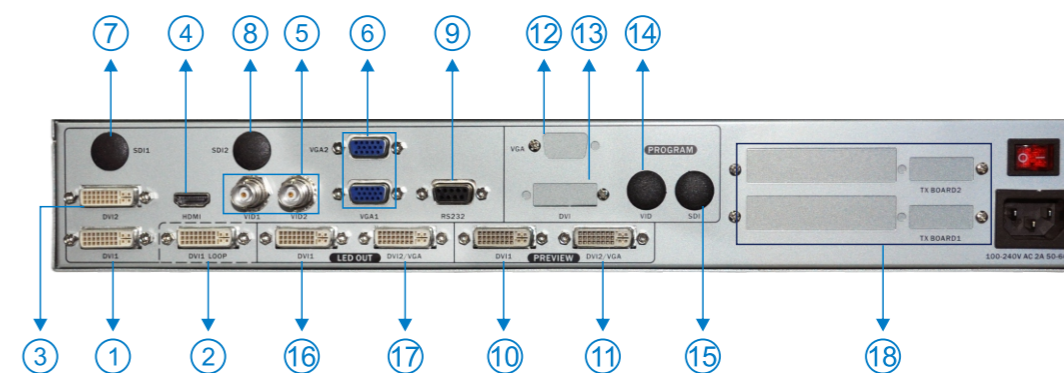


- | | | | |
|--------------------|-------------------------|-----------------------------|-------------------------|
| 1--DVI1 input | 6--VGA1,VGA2 input | 11--DVI2/VGA preview output | 15--SDI* program output |
| 2--DVI1 loop | 7--SDI1*input | 12--VGA* program output | 16--DVI1 Led output |
| 3--DVI2 input | 8--SDI2*input | 13--DVI * program output | 17--DVI2/VGA Led output |
| 4--HDMI input | 9--RS232 plug | 14--VID* program output | 18--Sending card plugs |
| 5--VID1,VID2 input | 10--DVI1 preview output | | |

FUNCTION DESCRIPTION


- Seamless Switch

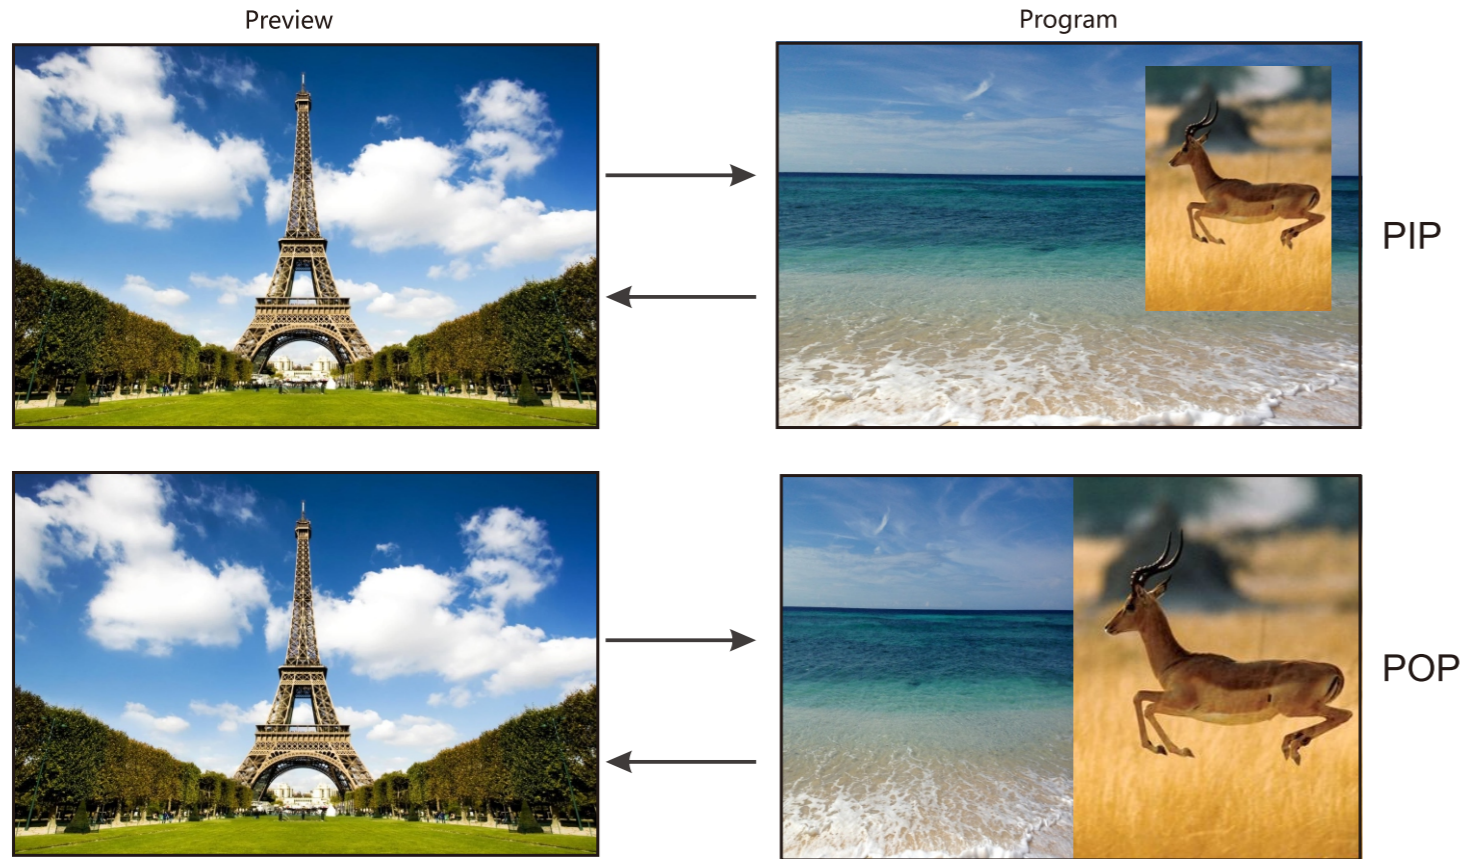


- Crop / Full

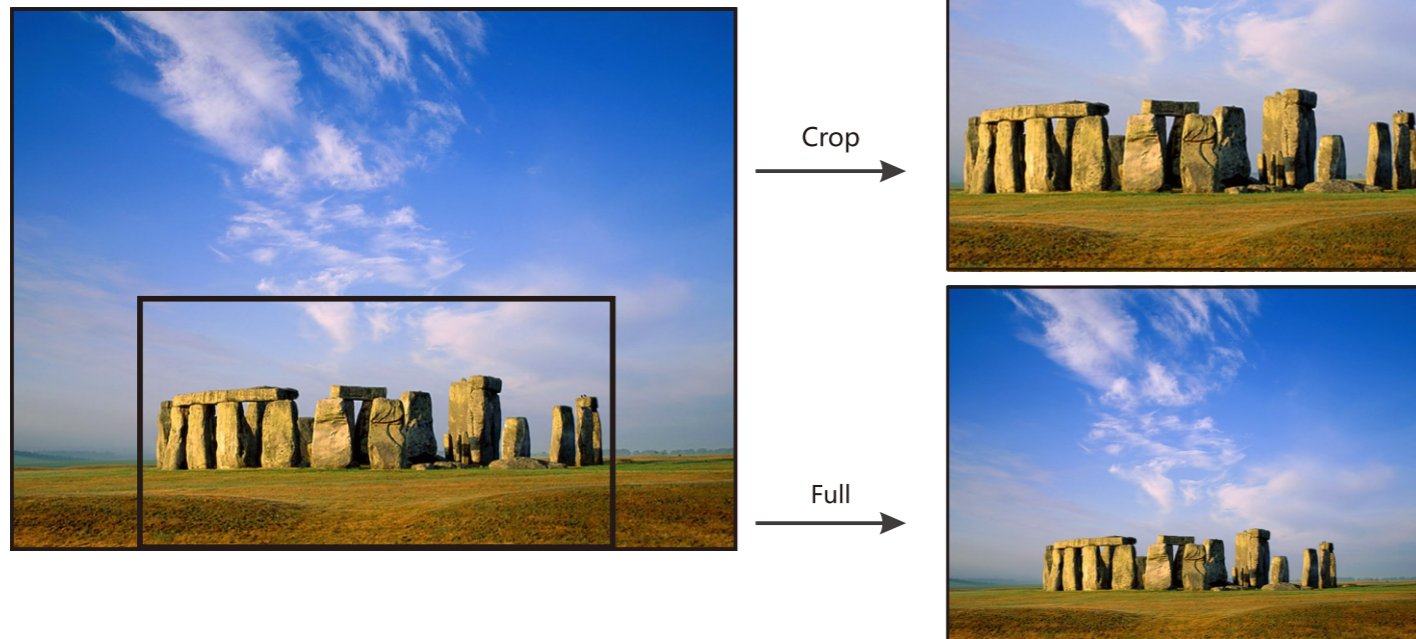

APPLICATION 1

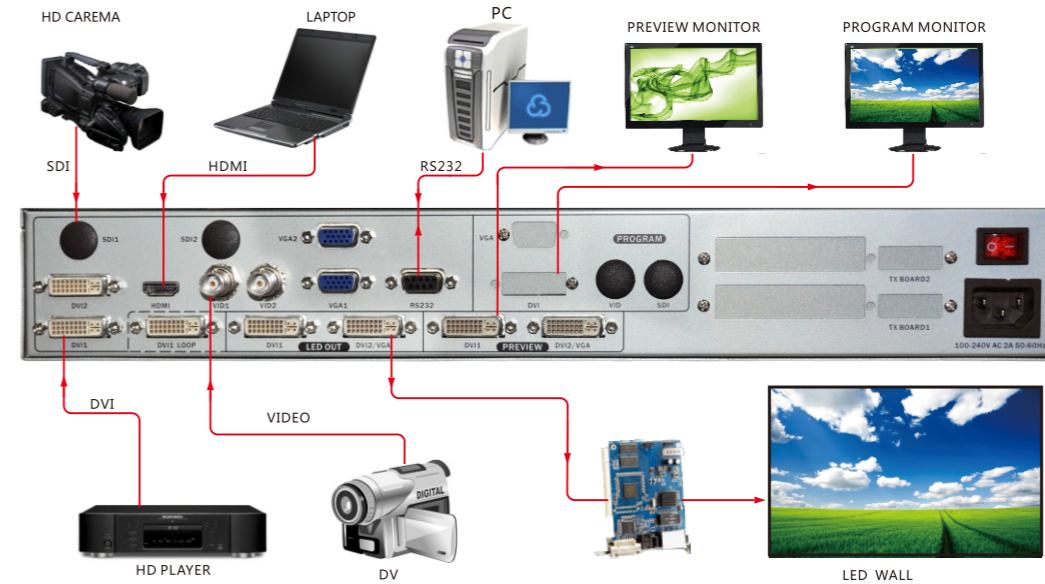

APPLICATION 2

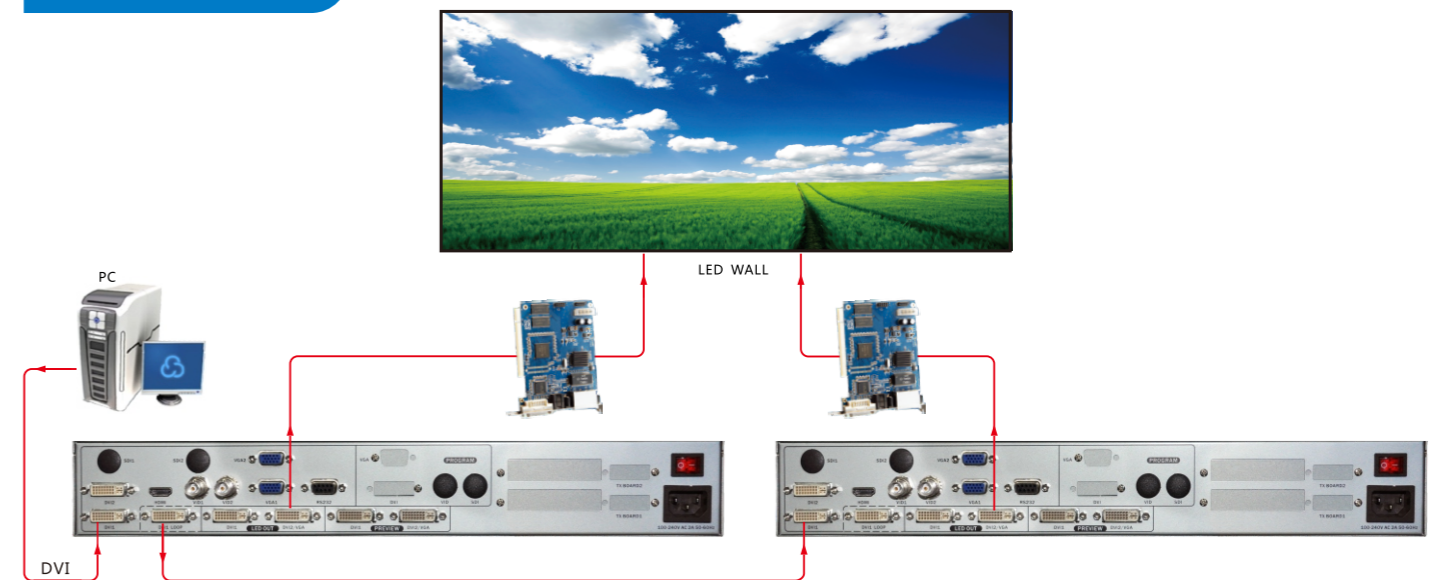

PRODUCT GUIDELINE

Item number	Description	Item number	Description
DVX602	Basic	DVX602D	Basic+Expanding Program output DVI&VGA &VID
DVX602S	Basic+Expanding 1x3G- SDI input	DVX602T	Basic+Expanding 2x3G- SDI input
DVX602SD	Basic+Expanding 1x3G-SDI input,Expanding Program output DVI&VGA &VID	DVX602TD	Basic+Expanding 2x3G-SDI input,Expanding Program output DVI&VGA &VID
DVX602SF	Basic+Expanding 1x3G-SDI input,Expanding Program output SDI&DVI&VGA&VID	DVX602TF	Basic+Expanding 2x3G-SDI input,Expanding Program output SDI&DVI&VGA&VID
DVX602F	Basic+Expanding Program output SDI&DVI&VGA&VID		