

SPECS

INPUT

Interface	Quantity	Connector	Spec
DVI	4	DVI-I	DVI1.0 , HDMI1.3 VESA Standard , PC to 1920x1200 , HD to 1080p
VGA	4	DB15	R、 G、 B、 Hsync、 Vsync:0 to1Vpp±3DB (0.7V Video+0.3V Sync) 75 ohm black level : 300mV Sync-tip : 0V VESA Standard , PC to 1920x1200
VIDEO	4	BNC	PAL/NTSC/SECAM 1Vpp±3DB (0.7V Video+0.3V Sync) 75 ohm 480i,576i
3G-SDI*	4	BNC	SD-SDI , HD-SDI , 3G-SDI 1080p 60/50/30/25/24/25(PsF)/24(PsF) 720p 60/50/25/24 1080i 1035i 625/525 line

PREVIEW/PROGRAM OUTPUT

Quantity	VGAX1 , DVI/VGAX1			
Connector	DVI-I			
Standard	VGA Standard : R、 G、 B、 Hsync、 Vsync:0 to1Vpp±3DB (0.7V Video+0.3V Sync) 75 ohm black level : 300mV Sync-tip : 0V DVI Standard : DVI1.0			
Resolution	800x600@60Hz 1280x1024@60Hz 1680x1050@60Hz	1024x768@60Hz 1366x768@60Hz 1920x1080@50Hz	1280x720@50Hz 1440x900@60Hz 1920x1080@60Hz	2048x1152@60Hz 1600x1200@60Hz 1920x1200@60Hz



GENERAL

Weight	6.5kg
Dimensions	8.8cm(H)x44cm(W)x30cm(D)
Power supply	100VAC-240VAC 50/60Hz
Power consumption	50W
Working temperature	0°C~45°C
Storage humidity	10%~90%

* Expanding model

JSTRON • SPEED LEADER • DVX402

- Program and preview outputs
- 3 live layers
- User defined resolution input
- 4 optional 3G-SDI input
- Logo capture and insert
- FREEZE mode
- Configurable input channels ,including DVI,VGA,VID,and 3G-SDI (optional)

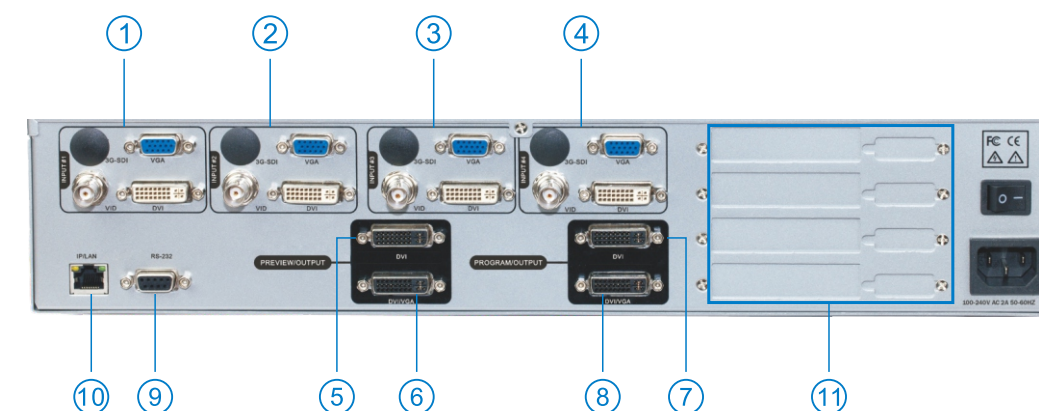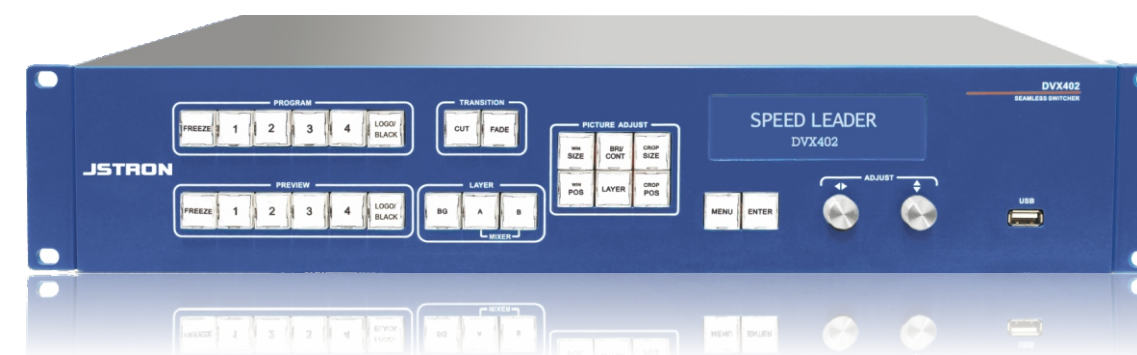

1--VGA,VID,DVI,SDI* input
2--VGA,VID,DVI,SDI* input
3--VGA,VID,DVI,SDI* input
4--VGA,VID,DVI,SDI* input

5--DVI output
6--DVI/VGA output
7--DVI output
8--DVI/VGA output

9--RS232 plug
10--IP/LAN
11--Sending card plugs

CONTACT US

Tel: +86-0755-8618 0829
Fax: +86-0755-8653 8364
Web:www.jstron.com
Tech Support: support@jstron.com
Email: sales@jstron.com
Add : 305 ,West Tower ,Haida Creative
Park , Nanshan District, Shenzhen, China

Ellen
Phone : +86-180 3818 6112
Email : ellen@jstron.com
Skype : jstron01


Alice
Phone : +86-180 3818 6113
Email : alice@jstron.com
Skype : jstron02

FUNCTION DESCRIPTION


• Layer illustration




• Mixer effects

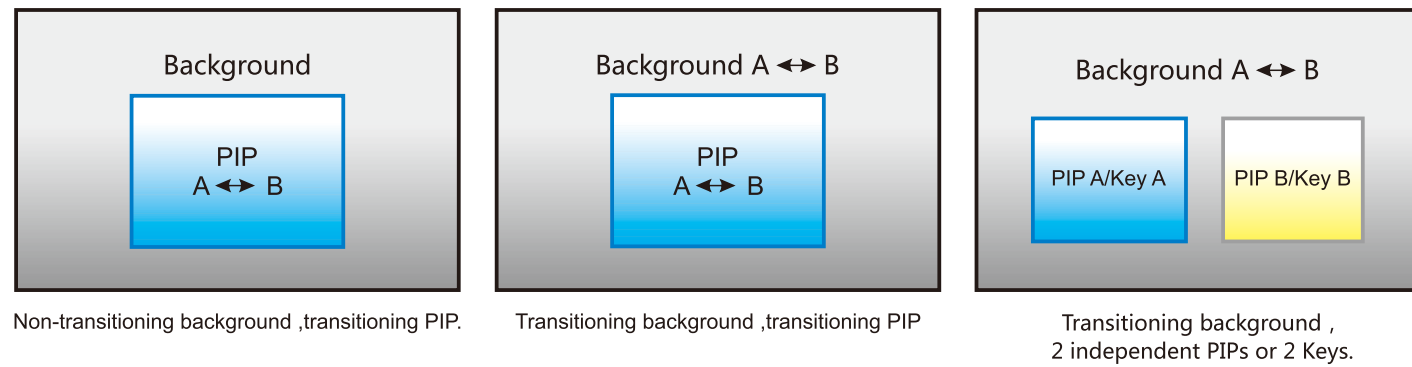


• Image Crop

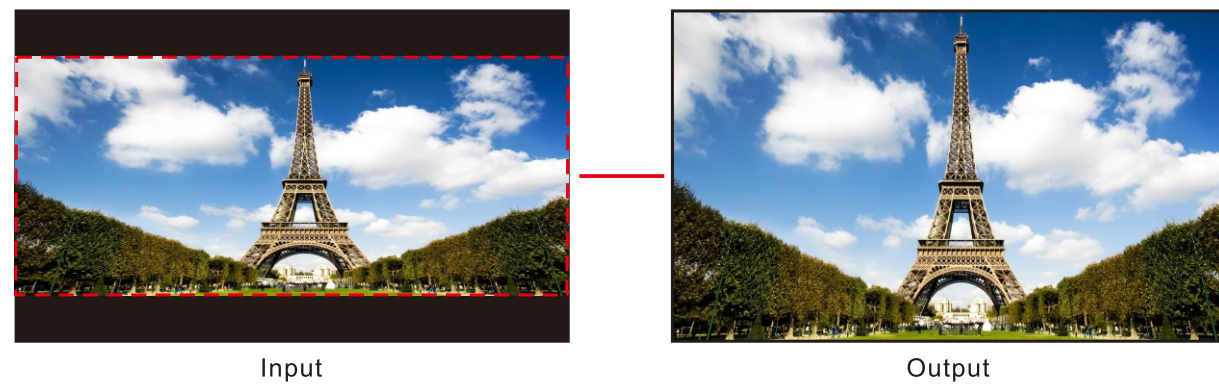

• Title

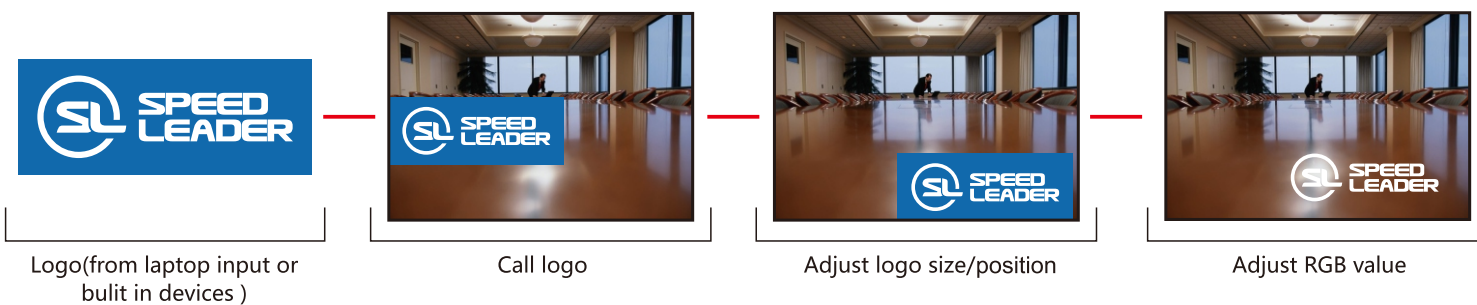

APPLICATION

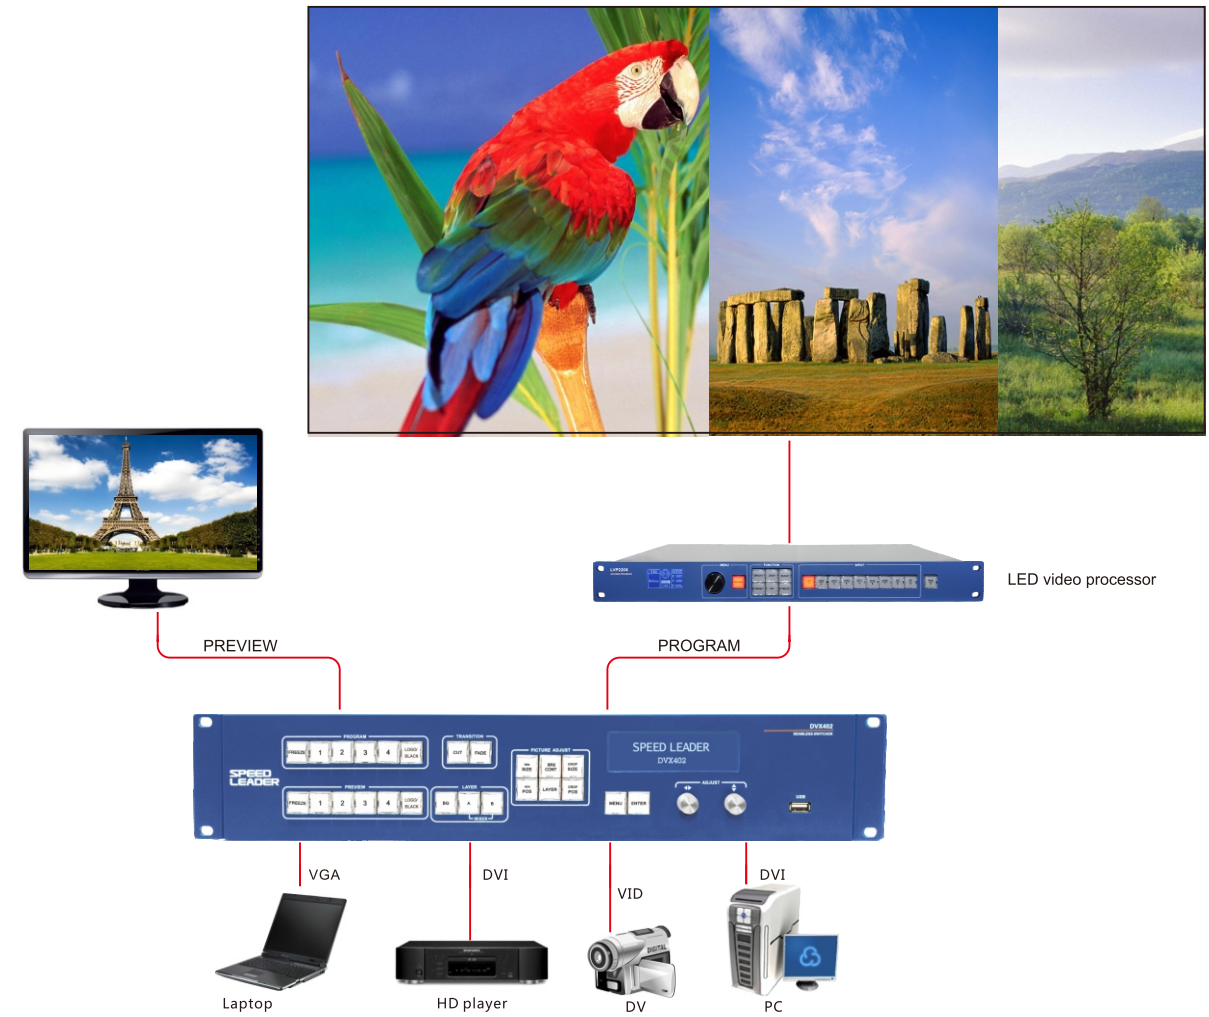

PRODUCT GUIDELINE

Item number	Description
DVX402	Basic
DVX402-41	Basic+Expanding 1*3G-SDI input
DVX402-42	Basic+Expanding 2*3G-SDI input
DVX402-43	Basic+Expanding 3*3G-SDI input
DVX402-44	Basic+Expanding 4*3G-SDI input