

**JSTRON** • SPEED LEADER • **A6**

## Multi-windows Seamless Switcher

- One console controls multiple VPs
- Multi-viewer monitoring
- up to 16 windows
- 3840×2160(4K60) input/output




A6 400




A6


## FRONT PANEL

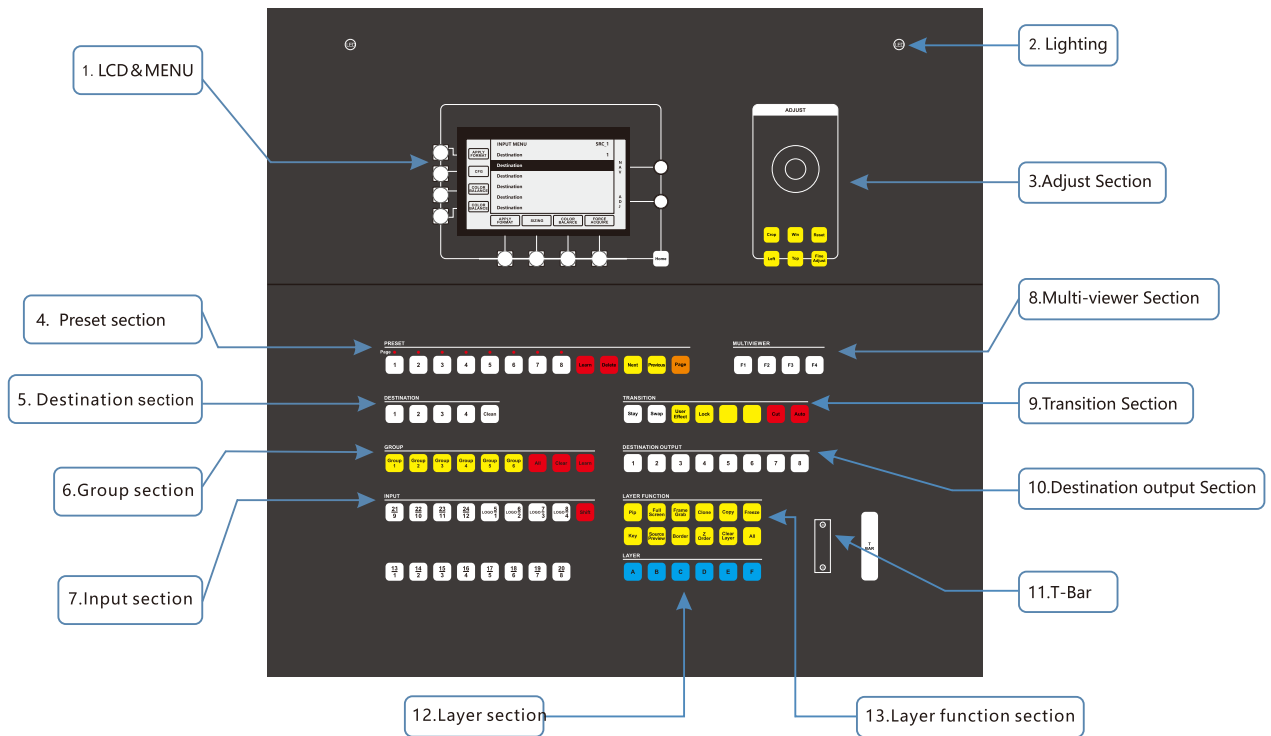


## PRODUCT FEATURE

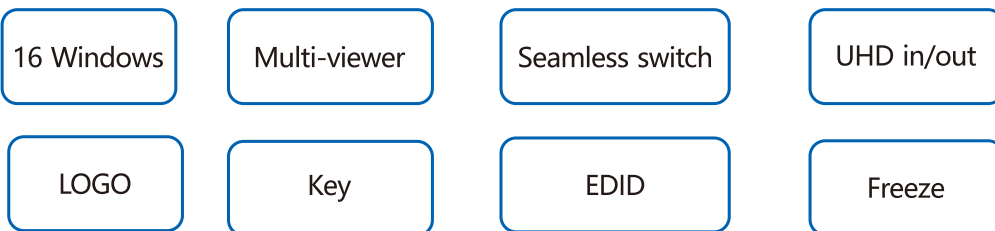

## PREVIEW/PROGRAM SWITCH

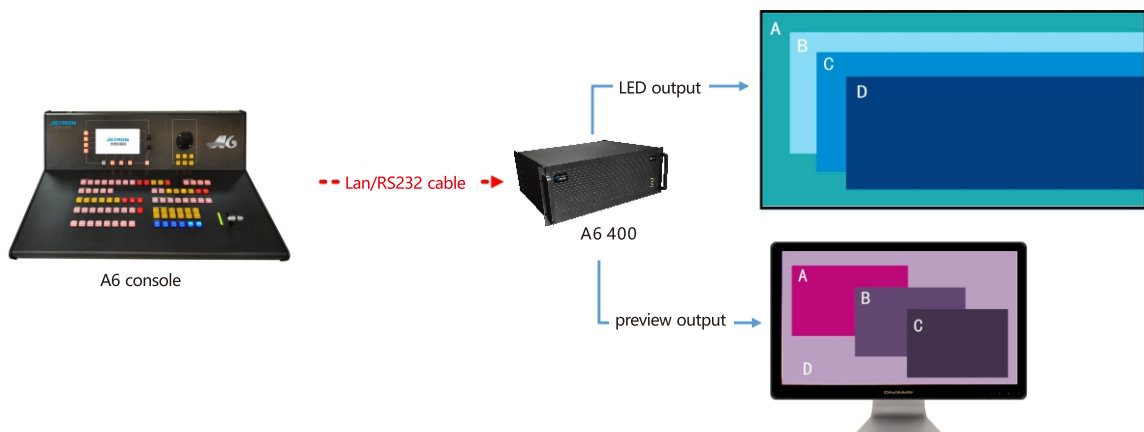

## VIDEO SIGNAL CONNECTION DIAGRAM

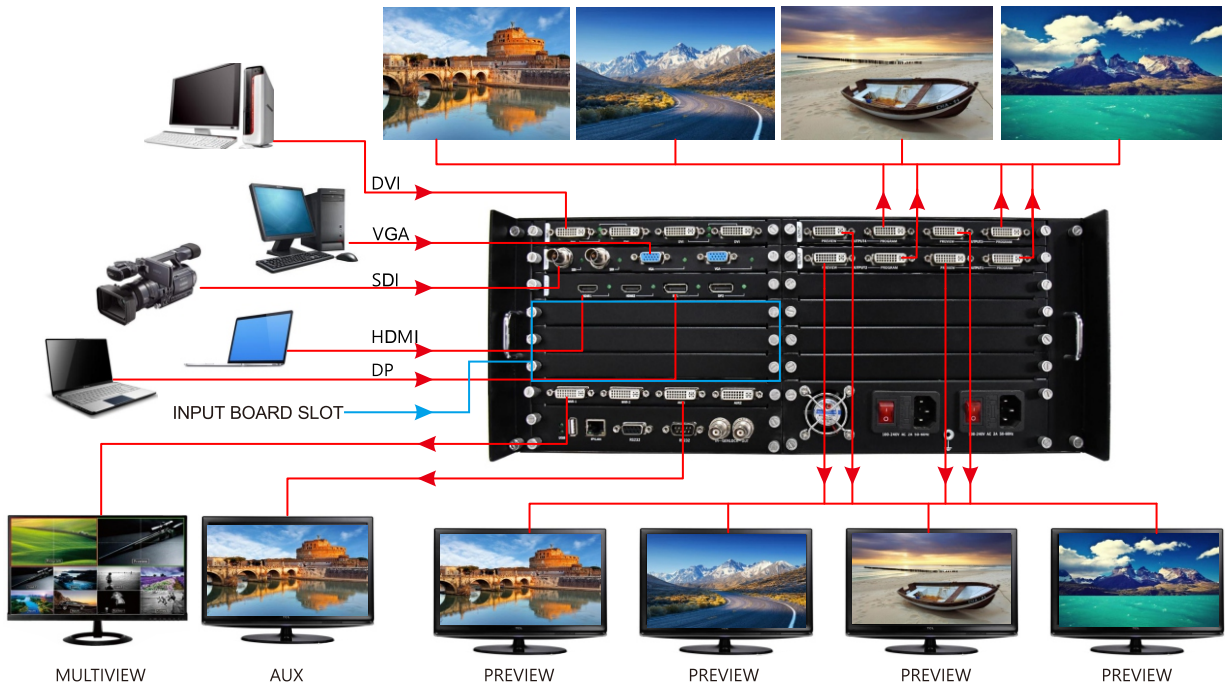

## WINDOW DISPLAY


Up to 16 windows .



Overlay/Cross-screen window processing

## A6 CONTROLS MULTIPLE VP


A6 console can control the editing of multiple VPs, thus setting different parameters for video output

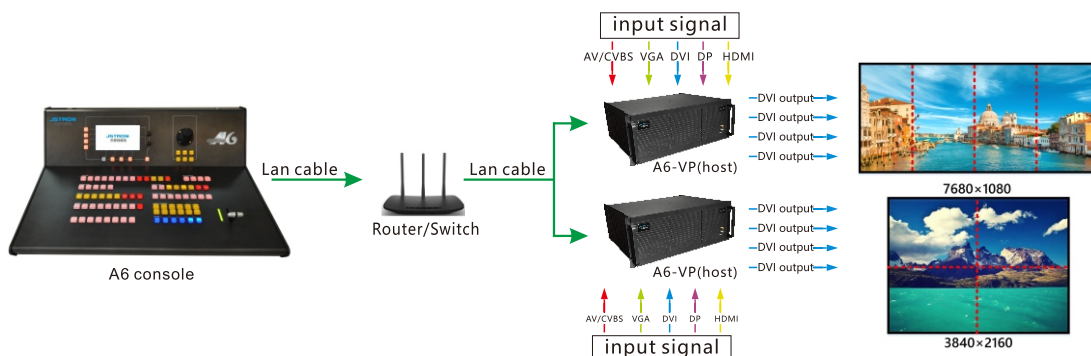


# A6-400

## MULTI-VIEWER BOARD

- 4 X1080p Output
- 6 Inputs Preview in each page
- 2x AUX Preview
- Screen Destinations (Program and Preview) can be previewd

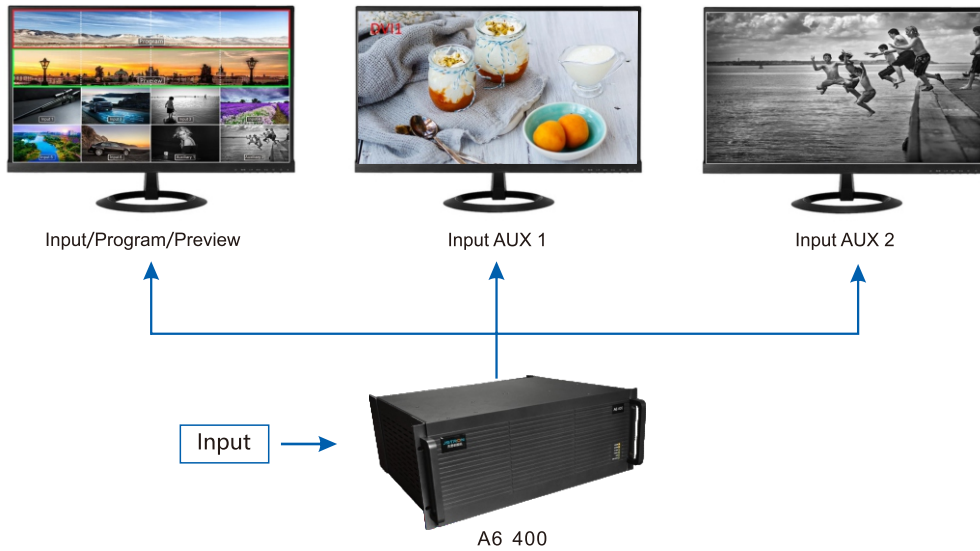


## THE DIAGRAM OF OUTPUT CONNECTION

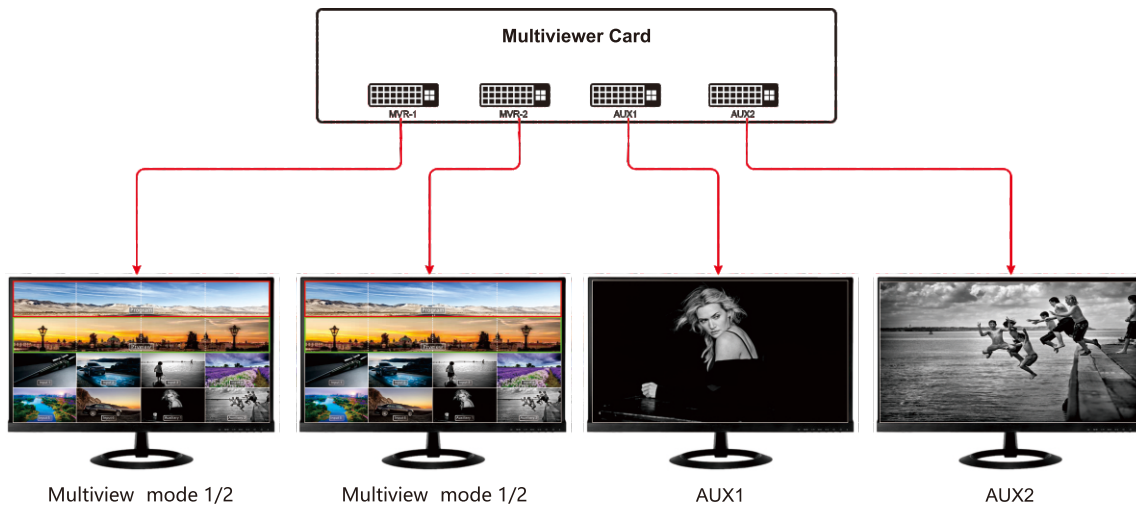


Note: The MVR-2 is the back-up of MVR-1

## THE INTRODUCTION OF MULTIVIEW MODE


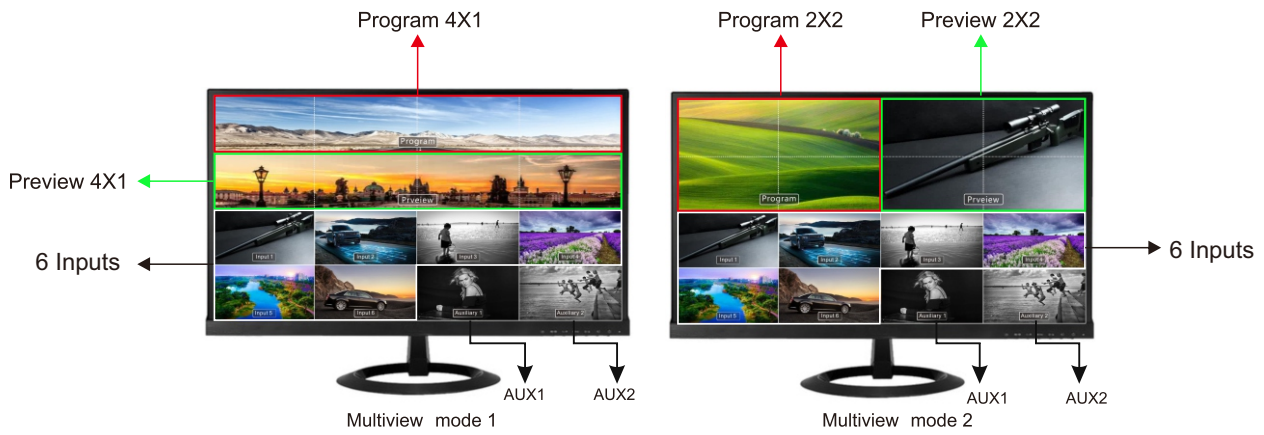


## THE POSITION OF INSTALL BOARD

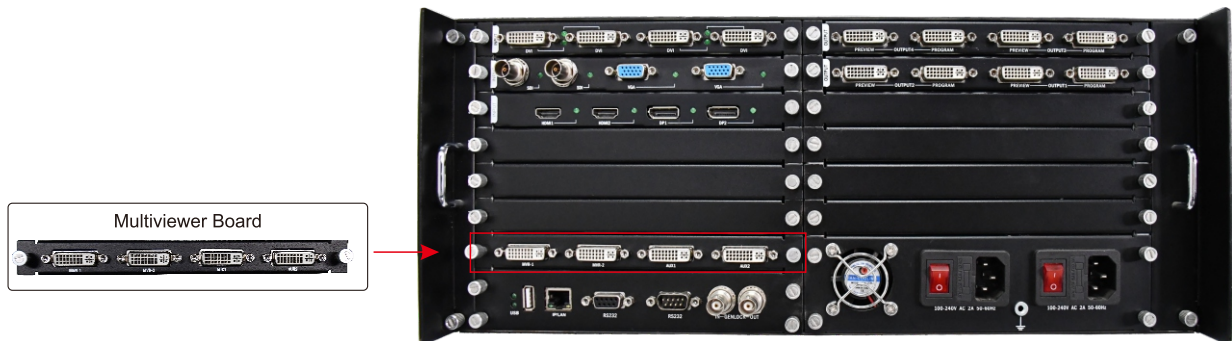

SHAPE SIZE

UNIT : MM

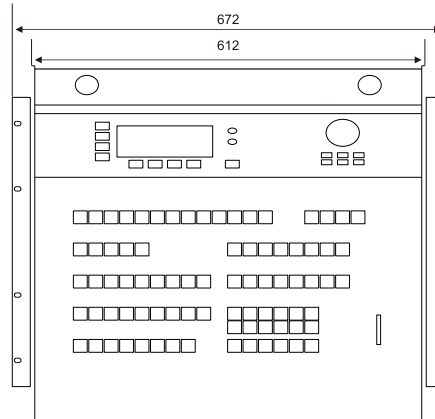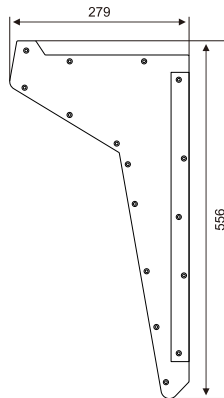

SPEC

INPUT

Interface	Connector	Spec
DVI	DVI - D	VESA Standard
VGA	DB15	VESA Standard
SDI	BNC	480i,576i,720p,1080i/p
DP	DP	VESA Standard
HDMI	HDMI	EIA/CEA-861 Standard , compatible under HDMI1.4

OUTPUT

output type	Quantity	Connector	Spec
program output	4	DVI-D	1920x1080p/60Hz
Preview output	4	DVI-D	1920x1080p/60Hz
Multi-viewer monitoring	4	DVI-D	1920x1080p/60Hz

GENERAL

Weight	A6 VP : 17KG	A6 console : 27KG
Dimension	A6 VP : 61.5cm(W)x53.5cm(D)x27cm(H)	A6 console : 48cm(W)x42cm(D)x17.9cm(H)
Power supply	100VAC – 240VAC 50/60Hz	
Working temperature	0°C ~ 45°C	

Subject to change without prior notice!

PRODUCT GUIDELINE

Item Number	Description	Item Number	Description
A6 400-F	A6 input:4DVI、2HDMI、2DP、2VGA 2SDI, total 12input , 4DVIoutput	A6 console	
		Optional module	
A6 400-DVI	Input card 4 DVI input	A6 400-VGA SDI	Input card 2 VGA、2 SDI input
A6 400-HDMI DP	Input card 2 HDMI、2 DP input	A6 400-MTB	Multiviewer card